

# CERTIFIED RECORD OF LAND CORNER MONUMENTATION

## History of Original Corner Establishment:

This Section corner was established by Henry Meldrum, Deputy Surveyor under Contract No. 226 and being dated May 29, 1875. His notes states he set a Basalt stone 18" x 8" x 6" for the section corner common to Sections 26, 27, 34 & 35, T 12 S, R 39 E W.M.

## Description of Corner Evidence Found:

At this corner location I found a Basalt stone, measuring 17" x 8" x 6" nearly fitting Henry Meldrum description of the stone he set. The stone has been incorporated in a historic rock jack at an ancient fence corner. I found no visible marks on the stone. There is evidence of a much older fence cornered here at this existing fence corner. It is my opinion the rotted remains of the older fence corner post is very near the original position of the stone as set by Henry Meldrum in 1875. By survey I found this old historic rock jack fence corner to be acceptable as the corner location as was set by Henry Meldrum in 1875.

## Description of Monument and Accessories I Established to Perpetuate the Original Location of Corner:

To perpetuate this section corner, at the assumed location of the remains of the old rotted post, I set a 2 inch Brass Cap on a 1" x 30" galvanized iron pipe. I buried the pipe to within 8 inches above the ground surface. I then placed a mound of stone and soil three feet in diameter about the monument covering the brass cap. The brass cap monument is stamped as shown in the accompanying photo.

I then set four bearing objects as follows:


Reference No. 1 is a 5/8" x 30" iron rebar with an orange plastic cap stamped Reference Monument which bears North, 12.00 feet distance. Monument pin was driven to within 6 inches above the ground surface.

Reference No. 2 is a 5/8" x 30" iron rebar with an orange plastic cap stamped Reference Monument which bears South, 12.00 feet distance and in direct line with bearing object No. 1. Monument pin was driven to within 6 inches above the ground surface.

Reference No. 3 is a 5/8" x 30" iron rebar with an orange plastic cap stamped Reference Monument which bears East, 12.00 feet distance. Monument pin was driven to within 6 inches above the ground surface.

Reference No. 4 is a 5/8" x 30" iron rebar with an orange plastic cap stamped Reference Monument which bears West, 12.00 feet distance and in direct line with bearing object No. 3. Monument pin was driven to within 6 inches above the ground surface.

I, James H. Hambleton certify that this corner was properly reestablished as witnessed by John Eggers on July 26, 2012.

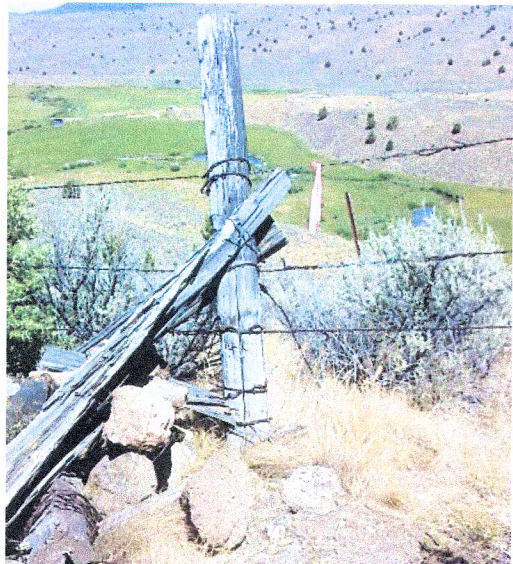

By survey I found this old historic rock jack fence corner to be acceptable as the corner location as was set by Henry Meldrum in 1875.



Set brass cap monument to within 8" of the surface in a mound of stone 3 feet at base around monument. Original stone is buried on the West side of monument.



Brass Cap as stamped.

This section corners true geographic position.  
44°30'129.99809"N 117°53'28.10145"W NAD83

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*James H. Hambleton*

OREGON  
JULY 10, 1964  
JAMES H. HAMBLETON  
645

Renews June 30, 2014

FILED Sept. 27, 2012  
BAKER COUNTY SURVEYOR  
SURVEY NO. 12-39-60