

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner was originally established under GLO contract number 409, dated August 22nd, 1881, executed by George Henderson. Surveyor General field notes state:

Set stone 18x12x6 ins in mound for 1/4 Sec. Cor. marked 1/4 S on W side, dug pits 20x12x10 ins. E and W of stone 5 ft. dist. and raised mound of earth 2 ft. high and 2 1/2 ft. diam. at base.

T 12 S R 40 E V-11

	S	33

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found 18 x 12 x 6 stone, faintly chiseled '1/4', in a 3 ft. diam. scattered mound of stone. Mound appears to have been utilized as a rock jack fence corner evidenced by wood posts heading to the West.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:



At position of found stone, I set a 2 1/2" x 30" aluminum pipe, 20" in the ground, with 3" aluminum cap marked as shown below, from which:

NEW BEARING OBJECTS:

- A 14" x 12" x 12" stone bears North 74°23' East, a distance of 19.17 feet, chiseled X BO.
- A 10" x 7" x 2" stone bears South 39°54' East, a distance of 35.14 feet, chiseled X BO.
- A 13" x 9" x 2" stone bears South 59°52' West, a distance of 29.41 feet, chiseled X BO.
- A 9" x 6" x 5" stone bears North 53°16' West, a distance of 22.04 feet, chiseled X BO.

I hereby certify that the corner was monumented on May 6, 2025

Witness: Kyle Tucker

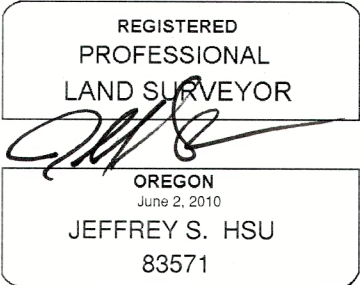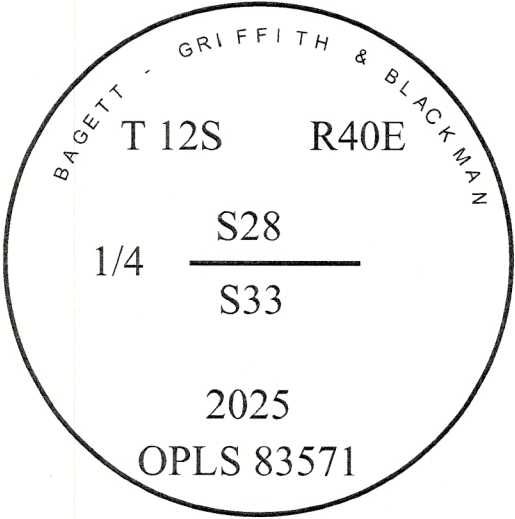

Renewal Date: June 30, 2027

I use a Leica GS18 with RTK in the establishment of the new bearing objects. Basis of Bearing is as per the "Oregon Coordinate Reference System Baker Zone". Bearings and distances are measured to the chiseled 'X'.

V-11

FILED June 25, 2025
BAKER COUNTY SURVEYOR
SURVEY NO. 12-40-34