


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner not previously established

T 12 S R 41 E D-18



DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8" iron pin with a 2 1/2" aluminum cap, 26" in the ground marked as show below with collar of stone 1' diam., from which:

NEW BEARING OBJECTS:

A 19" Juniper North 2° East, a distance of 35.55 feet, marked SW 1/16 S2 BT


A 17" Juniper South 21° East, a distance of 34.20 feet, marked C 1/16 S2 BT

Set a steel fencepost approx. 1 ft. North

I hereby certify that the corner was monumented on May 5, 2021.



Renewal Date: June 30, 2021

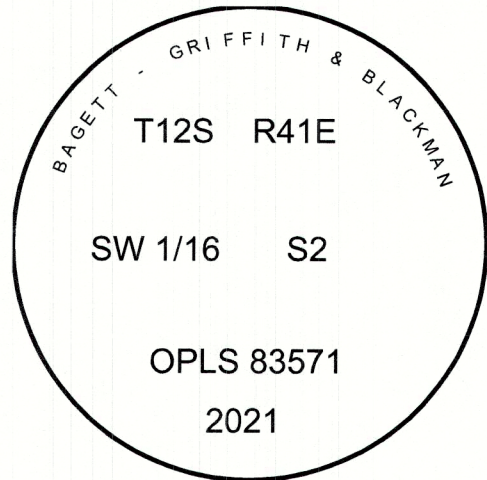

I used a magnetic compass and steel tape in the establishment of the new bearing trees. Distances are measured to a 60d spike in the side of the root crown of the tree. Bearings are measured to a brass washer in the lower blaze marked OPLS 83571. Magnetic declination used was 14° East.

D-18

FILED May 12, 2021
BAKER COUNTY SURVEYOR
SURVEY NO. 12-41-42