

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


V-6

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner was never established.


DESCRIPTION OF CORNER EVIDENCE FOUND:

Corner was never established.

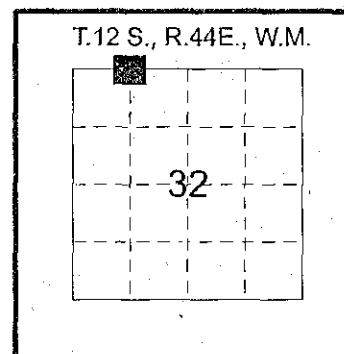

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Set a 3 1/4 in. diam. alum. cap on a 5/8 in. diam. by 30 in. long iron rod (rebar) driven 27 inches in the ground, placed rock collar around monument, with punchmark at center and steel t-post placed 1ft. westerly, marked as shown:

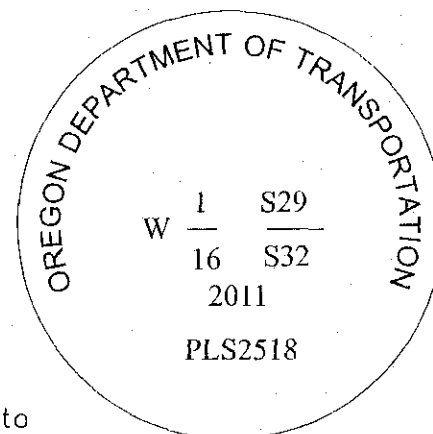

From which: I establish the following references:

A found t-post, antique style with holes along edge, exposed to 23 ins. above ground, bears S73° 49'E, 9.7 ft. (position at base).

A blue DEEP-1 magnet, buried 4 in. in the ground, at base of long berm running NW'ly and SE'ly, bears S40° 30'W, 11.4 ft.

Accessories taken with Leica 1200 GPS system using local grid based on Oregon Coordinate System of 1983 and NAD 83 datum, using average convergence angle of 2° 14', rotated positive, to convert grid to true meridian, true bearings are shown hereon.

Witnesses:

Pete Elder, Jeff Miles

I hereby certify that the above corner position was perpetuated as hereon described on Dec. 13, 2011.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 25, 1991
JAY M. ROUNDTREE
2518

FILED May 8, 2012

CLATSOP COUNTY SURVEYOR