

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner established by Eugene P. McCornack under Contract No. 398, dated April 02, 1881.

Surveyor General records state:

Set basalt stone 18 x 12 x 7 ins 12 ins in ground for cor to secs 1, 2, 35, 36 marked with 1 notch on the E and 5 notches on the W edges and raised a mound of stone alongside. Pits impracticable.

A-21



Description of corner evidence found:

Found a 22 x 11 x 8 ins basalt stone, loosely set in a mound of stone with 5 notches on West edge and 1 notch on East edge clearly visible.

Description of monument and accessories established to perpetuate the original location of this corner

At position of found original stone...

Set 2½" aluminum pipe with 2½" aluminum cap 10" in the ground and surrounded with a mound of earth and stone. Cap marked as shown in corner diagram. Buried corner stone alongside.

Compass declination 19° East.
New bearing trees established:

A 30" juniper bears N24°E, 111.4' scribed T12SR36ES36 BT.

A 18" juniper bears N42½°W, 193.3' scribed T12SR36ES35 BT.

New bearing trees have a brass washer stamped PLS 1106 nailed to face of blaze. Attached sign 54-3 & 54-9 and painted face of blaze and a 6" band around each BT. Set steel fence post alongside corner and attached sign 54-9 and 54-3.


Two reference monuments also established:

A reference monument bears S25½°E, 20.0'

A reference monument bears S47°W, 15.6'

Note: reference monuments are 1½" aluminum caps on 5/8" by 30' rebar, with steel fence post & signs 54-9 & 54-3 attached.

I hereby certify that the above corner monument was properly re-established to U.S.F.S. standards under my supervision and witnessed by Willard Hulick on November 4, 1986.

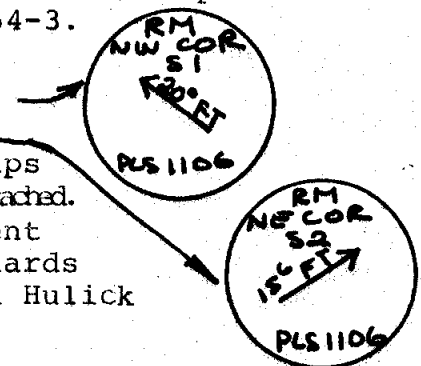

Office of County Surveyor..... County of Baker
 State of Oregon....., I hereby certify that the within instrument was filed in this office
 for record on the day of; 19....., at o'clockm., (signed)
 by
 (COUNTY OFFICIAL) (DEPUTY)

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Willard R. Wells

OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106

Form R6-7100-57 (9/66)

FILED 1-23-87

BAKER COUNTY SURVEYOR

SURVEY NO. 13-36-64