


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**DIAGRAM**  
T 13 S R37E



*History of original corner establishment:*

The original corner was set by George Henderson in 1881 under GLO Contract #409 dated August 22, 1881 and approved March 28, 1882. 40.00 Drove cotton wood post 3 ft. long and 2 ins. Square with pits and earthen mound.

*Description of corner evidence found:*

At the corner locus I found the following: A 5/8" iron pin driven flush with the highway pavement.

From Which:

- A 5/8" iron pin bears N89°43'10"E 15.01 feet
- A 5/8" iron pin bears S00°03'02"E 15.00 feet
- A 5/8" iron pin bears S89°51'18"W 15.02 feet
- A 5/8" iron pin bears N00°03'31"E 30.24 feet

All unrecorded.


*Description of monument and accessories I establish to perpetuate the original location of this corner:*

I established nothing. However, I accepted the above described pin and accessories as the best available evidence of the original corner position.

Distances were taken with a Lieca 703 instrument and the bearings are based on Baker County Survey 13-37-21.

Witness: Chris Ackerman  
6/3/2009

Reference: Baker County Survey 13-37-25

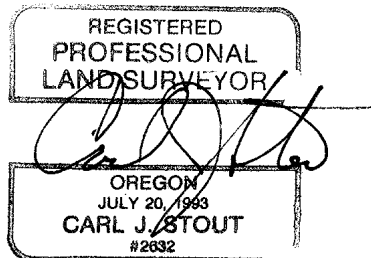

*RENEWAL 7/20/10*

Office of County Surveyor, County of Baker, State of Oregon,  
I hereby certify that the within instrument was filed in this office  
for record on the 10<sup>th</sup> day of Dec., 2009.

Tom Huley by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)

Index #L-9

FILED Dec. 10, 2009  
BAKER COUNTY SURVEYOR  
SURVEY NO. 13-37-27