


RECORD OF LAND CORNER MONUMENTATION

CORNER: NE Cor. Sec. 30, Twp. 13 S., R. 37 E., W.M.
ORIGINAL SURVEY BY: George Henderson, U.S. Deputy Surveyor
CONTRACT NUMBER: 409
CONTRACT DATE: August 22, 1881



ORIGINAL G.L.O. DESCRIPTION: Drove cottonwood post 3 ft long and 3½ ins Square for cor. to Sec 19, 20, 29 and 30 marked T13S S19 on NW, S20 on NE, S30 R37E on SW, S. 32 on SE faces. dug pits 20x12x10 ins. in each Sec. 5½ ft. dist and raised a mound of earth 2½ ft. high 3 ft diam. at base around post.


EVIDENCE FOUND: In the vicinity of the search area for this corner, we found deteriorated remains of a fence running north and south. Henderson's notes state, "descend" immediately after he returned to said corner. We found no evidence of the post or pits and mounds, but i did accept a location at which the terrain descended along the old fencing material for the corner position.

DESCRIPTION OF MONUMENT AND ACCESSORIES SET:

At the corner point I set a 5/8"X30" iron pin with attached 2½" aluminum cap, 27 inches the ground. Built a 2 ft. mound of stone around iron pin. Cap is marked as shown below.

FROM WHICH, I SET THE FOLLOWING REFERENCE POINTS:

- A 5/8"X30" iron pin bears N.41°08'E., 37.55 ft., with attached yellow plastic cap marked BENCHMARK SURVEYING
- A 5/8"X30" iron pin bears S.42°41'E., 29.54 ft., with attached yellow plastic cap marked BENCHMARK SURVEYING
- A 5/8"X30" iron pin bears S.37°00'W., 38.23 ft., with attached yellow plastic cap marked BENCHMARK SURVEYING
- A 5/8"X30" iron pin bears N.52°35'W., 36.28 ft., with attached yellow plastic cap marked BENCHMARK SURVEYING

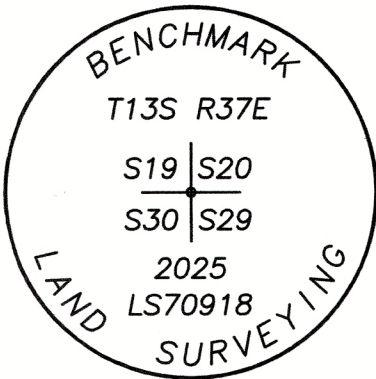

Used RTK GPS to measure Reference Points. Bearings to RP's are based on Baker County Survey 13-36-94.

Work Performed BY:

Michael C. Springer, PLS
Thea Ensign, Technician

Benchmark Land Surveying, Inc.
217 N. Canyon Blvd.
John Day, OR, 97845
(541) 620-0676
mike@benchmarkls.com

Surveyed: June 12, 2025



EXPIRES: 6/30/2026

FILED July 8, 2025
BAKER COUNTY SURVEYOR
SURVEY NO. 13-37-41