

Alpha-Num.
Index # J-23

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of Original corner establishment:

DIAGRAM
T14S R44E
1/4 S 12
S 13
1997
BAKER COUNTY
SURVEYOR

The original corner was set by Henry W. Cooke under GLO contract no. 427, dated December 15, 1881, as part of a subdivisional survey of T. 14 S., R. 44 E., W.M.

The original GLO notes state: Set a basalt stone 16x10x6 ins. 11 ins. in the ground for 1/4 sec. cor. marked 1/4 on N. face and raised stone mound.

Description of corner evidence found:

Found a wood stake at a N-S-W fence intersection accepted as the corner from a previous survey by James Hambleton. No evidence of the original corner stone was found and the fence intersection was accepted as the corner point.

Description of monument and accessories I established to perpetuate the original location of the corner:

At the position of the fence intersection and wood stake set a 1 1/4" x 30" galvanized pipe with a 2 1/2" dia. brass cap 24" into the ground surrounded by a 36" dia. stone mound. The brass cap is marked as shown in the corner diagram.

Corner monument references: Four 1" x 2 1/2" magnets encased in plastic were set 6" below the ground. From the corner monument:


A silver magnet mkd. "1" bears N. 41° E., 9.5 ft. dist.
A pink magnet mkd "2" bears S. 52 1/2° E., 11.3 ft. dist.
A blue magnet mkd. "3" bears S. 41° W., 6.0 ft. dist.
A orange magnet mkd. "4" bears N. 52 1/2° W., 6.4 ft. dist.

Staff compass declination: 18°.
Reference survey see CS 14-44-18

I James D. Hanley certify that this corner was properly monumented as witnessed by Larry McBroom on August 19, 1997.

Renews June 30, 1999

FILED OCT. 29, 1997
BAKER COUNTY SURVEYOR
SURVEY NO. 14-44-22

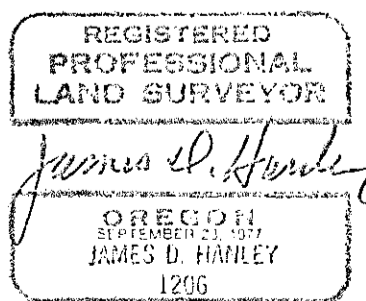

10-29-97