

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by John Hagel U.S. Deputy Mineral Surveyor, under instructions dated October 19, 1899, for the survey of the Century Lode, a portion of MS 378.

Surveyor General records state:

To Cor. No. 4 (of the Century Lode).

Set a white fir post 4 ins. square, 4 1/2 ft. long, 18 ins. in the ground with a mound of rocks around it, marked Century C.4-378.

A white fir tree 10 ins. diam., bears N61°15'E, 64.0 ft.
A white fir tree 8 ins. diam., bears S63°E, 30.5 ft.
Both blazed and marked Century C. 4-378 BT.

T 9 S R 37 E
MS 653A / MS 378
20 / 4C

Orleans
Cor. 2

Century
Cor. 4

Corner recovered & amended by: Wm. W. Elmer, U.S. Deputy Mineral Surveyor, under instructions dated November 28, 1905, for the survey of the Orleans Quartz Mining Claim, MS 653A. Surveyor General records state: Cor No 2 (of the Orleans Lode), identical with Cor No 4, Sur No 378, Century Lode, a post 5 ins square set in ground with mound of earth & stone scribed Centy. C-4-378, 2-653A Or., whence a fir 16 ins dia bears N85°22'W, 7.85 ft. A pine 6 ins dia bears S38°42'E, 40.20 ft, both blazed and scribed 2-653A, OR. BT.

Corner position remonumented & perpetuated by: John R. Mitchell in 1980...experienced corner recovery technician, as noted below. No record filed with Baker County Surveyor.

Corner was remonumented by: William L. Hanley, per Corner Record 9-37-155 (8-37-122), dated February 18, 1988.

Found a JRM 2 1/2" brass cap on 1" galvanized iron pipe with surrounding rock mound and rotting pieces of wood with fragmentary scribe marks, brass cap marked as shown to right, from which:

OBT: A white fir, 22" dia with fully healed blaze brs N63 1/2°E, 43.4' dist (record, N61°15'E, 64.0' dist).
A white fir 20" dia with fully healed blaze brs S60 1/2°E (record, S63°E), 30.5' dist per record.
A white fir 29" dia with fully healed blaze brs N85°22'W, 7.85' dist per record.
No trace of other MS 653A BT.

JRM BT: A white fir 11" dia with partially headed blaze brs N10 1/2°W, 37.0' dist mkd CEN 4 MS 378 BT.

At position of JRM brass cap monument...

Removed brass cap monument & replaced with a 2" x 30" aluminum pipe with 2 1/2" aluminum cap 25" in ground, surrounded with mound of earth & stone. Cap marked as shown in corner diagram. Set 6' steel fence post alongside with sign 54-9 & 54-2 attached.

No new bearing trees established.

Painted 6" band of red paint around each OBT & JRM BT, also painted blaze and attached signs 54-3 & 54-9 to all BTs.

Compass declination 20° East.

I hereby certify that the above corner monument was properly remonumented to USFS Standards by me and witnessed by Bill Gohring on November 9, 1987.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Kristina Powell

OREGON
MAY 9, 2017
KRISTINA POWELL
91201

EXPIRES 12-31-24

Continued on page 2 of 2

FILED January 3, 2024
BAKER COUNTY SURVEYOR
SURVEY NO. 9.37 - 359

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Description of corner evidence found:

Corner was not remonumented by Hanley as stated.

Found a 1 inch galvanized iron pipe with a 2 1/2 inch brass cap, marked as shown. Firmly set 8 ins. above ground with 3 ft. diam. by 1 ft. tall stone mound.

From which:

A 31 inch white fir (by Hagel) with healed blaze, bears N63 1/2°E, 43.4 feet, alive and healthy.

A 25 inch white fir (by Hagel) with healed blaze, bears S60 1/2°E, 30.5 feet, alive and healthy.

A 29 inch rotten fir stump (by Hagel) with healed blaze, bears N85°22'W, 7.85 feet.


A 17 inch white fir (by Mitchell) with healed blaze, bears N10 1/2°W, 37.0 feet, alive and healthy.

Monument falls North 0.25 miles of NF-5540 Road.

T 9 S R 37 E
MS 653A / MS 378
20 / 4C

Orleans
Cor. 2

Century
Cor. 4

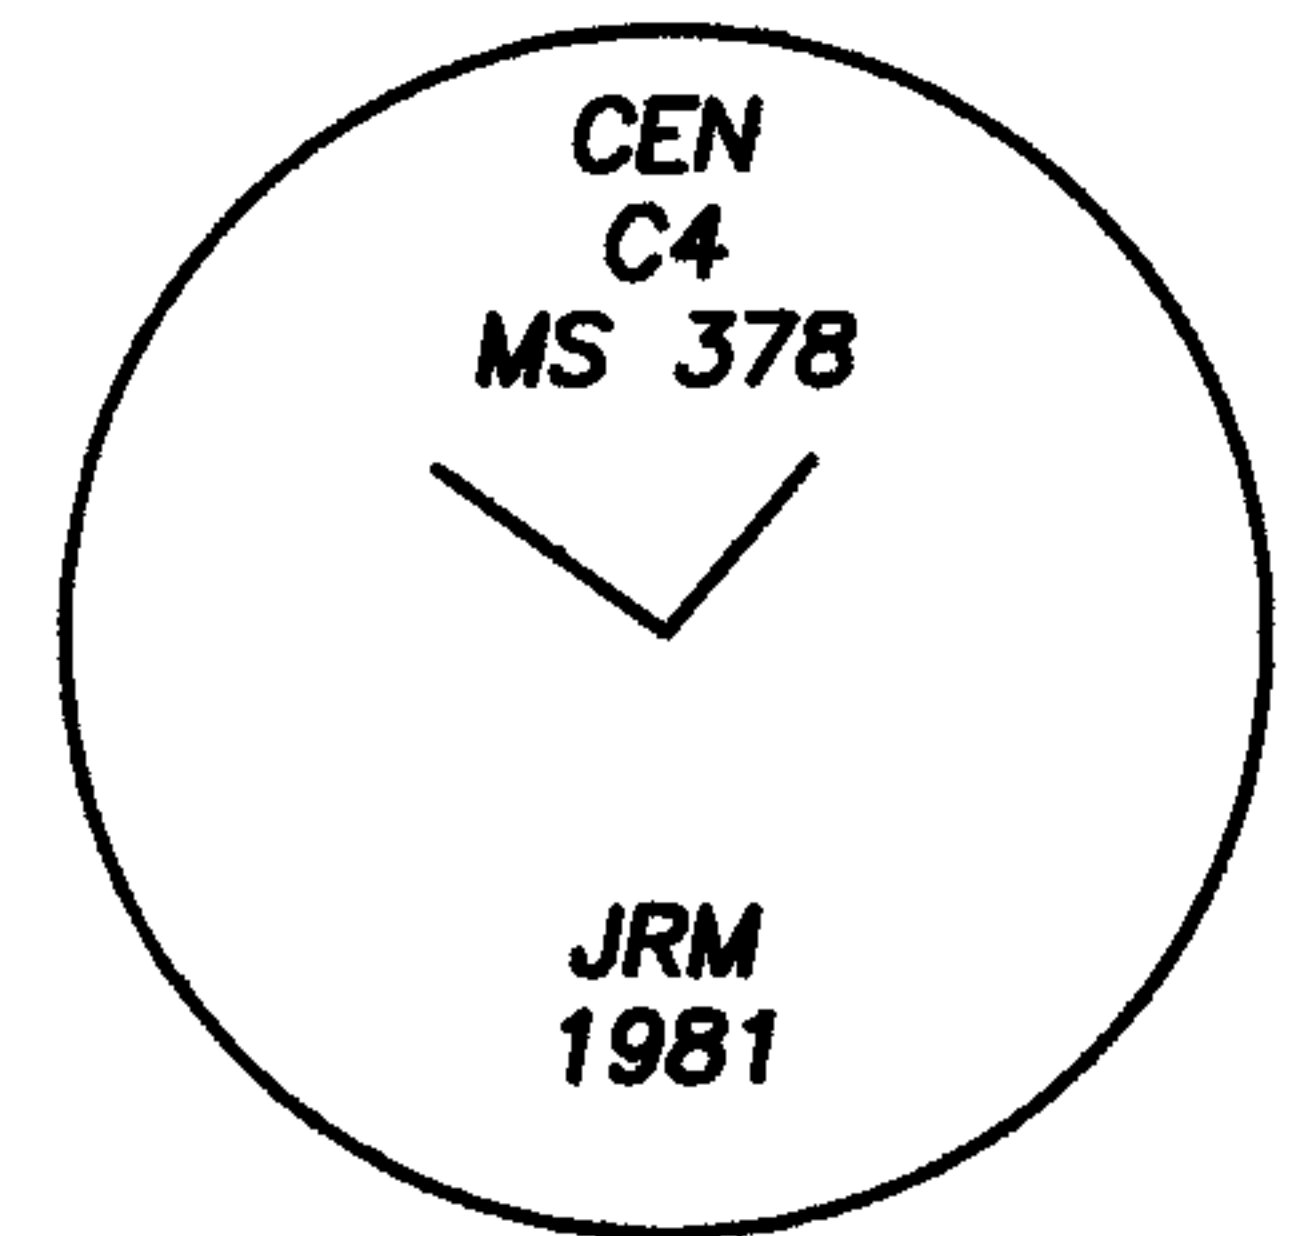

Description of monument and accessories I established to perpetuate original location of this corner:

No new bearing trees established.

Added Bearing Tree and Land Survey Monument signs as needed.

Replaced steel T-post N56°E, 5 feet with Property Boundary sign.

Set a steel T-post S49°W, 5 feet with Property Boundary and Land Survey Monument signs.

NAD 83 Geodetic Position

Lat. 44°48'53.7" N
Long. 118°13'10.1" W

Established by: Garmin ETREX 32x

I hereby certify that the corner is monumented and accessories taken as described using a steel tape and a Warren Knight staff compass, set with a declination of 14° East.

Witnesses: David Quittschreiber, Justin Seal, Shar Hutchison

August 3, 2023

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Kristina Powell

OREGON
MAY 9, 2017
KRISTINA POWELL
91201

EXPIRES 12-31-24

FILED January 3, 2024
BAKER COUNTY SURVEYOR
SURVEY NO. 9-37-359